

National Seeds Corporation Ltd.

(A Govt. of India Undertaking)

Plot No. 388,Phase IXIndst Area- Mohali Pin 160062

Regional Office Mohali-Chandigarh

Phone No.0172-2214388/2215388 Fax 0172-2213388

No.12(24)Admn/NSC/Chd/13-14

Dated 22-1-14

Notice Inviting Tender

National Seeds Corp.Ltd. Mohali (Chandigarh) invites sealed tender from reputed Contractors registered with Centre/State/Semi Govt. for Construction of Toilets for Girls in School of Village Chambamori & Dharnia Distt.Fatehabad Haryana in the prescribed tender form upto 2.00P.M. on 6-2-14 which will be opened at 2.30 P.M. on the same date on the above given address in the presence of tenderers. The tender documents along with terms and conditions are obtainable @ Rs.500/- from above office and office located at Hissar(01662-292143). Tender documents can also be downloaded from NSCs website www.indiaseeds.com. and www.eprocure.gov.in. In such cases the tenderer has to deposit Rs. 500/- along with filled tender form.

(Dr.P.K.Tyagi)
Regional Manager

Terms and conditions for Construction of Toilets for Girls in School of Village Chambamauri & Dharnia Distt.Fatehabad Haryana under CSR Programme,NSC Chandigarh(Mohali).

- 1- The Contractor should be registered with State or Centre Govt./Organization
- 2-The Contractor have valid proof of Registration certificate , PAN No. and two years income tax return .
- 3-The work will be completed in one month after issue of order
- 4-Payment will be released not less than Rs.50,000 at a time, except final bill.
- 5-Work will be completed as per drawing and quality of material
- 6- Income tax and other tax will be deducted on all the payments
- 7 Employees of NSC and their family members are not eligible for the tender
- 8- EMD of Rs. 5000/- (DD)maybe deposited in favour of NSC Chandigarh alongwith tender
- 9-EMD will be refunded to the unsuccessful tenderer after issue of order of Contract awarded.
- 10 Security of Rs.5% will be deducted from every bill and EMD deposited at the time of tender will also be retained as security.
- 11- After completion of work the payment of last bill will be made after fifteen days
- 12 The security will be refunded after issue of No default certificate from the Assistant Engineer(Civil)
- 13 The rates will be quoted in the schedule of quantity
- 14 The rates will be quoted in words and figures.
- 15 Copy of PAN/Experience certificate and IT return will be submitted along with tender form.
- 16 RM NSC Mohali(Chandigarh) reserve the right to accept/reject any or all the tenders
- 17 Tender Notice schedule of quantity and terms & conditions are the part of Tender.
- 18 All the dispute will be settled by CMD at H.O. level NSC New Delhi

SCHEDULE OF QUANTITIES

NAME OF WORK :- CONSTRUCTION OF TOILET FOR GIRLS IN SCHOOLS OF VILLAGE DHARNIA AND CHAMBAMAURI DISTT FATEHBAD HARYANA

Sl.No.	Description of work	Qty.	Unit	Rate	Amount
1-	Earth work in excavation by Mechanical Means/Manual Means over area (exceeding 30cm in depth 1.5m in width as well as 10sqm on plan) including disposal of excavated earth all kind of soil	30.50	Cum		
2-	P/L in position cement concrete of specified grade excluding the cost of centering & shuttering 1:3:6 (1 Cement-3 coarse sand:6 stone aggregate 20mm nominal size)	2.35	Cum		
3-	R.C.G. in beams, suspended floor, roofs having slope upto 15 landing, balconies shelves, chajjas, lintels etc upto floor five level excluding centering and shuttering, finishing and reinforcement with 1:2:4(1Cement: 2Coarse sand:4 Graded Stone aggregate 20mm nominal size)	2.25	Cum		
4-	Centering and shuttering including strutting, propping etc., and removal of form work suspended floor, roof, landing and balconies	20.00	SQM		
5-	Steel reinforcement for RCC work including straightening, cutting, bending, placing in position and binding all complete.	195	Kg.		
6(a)-	Brick work with common burnt clay F.P.S.(non modular bricks of class designation 7.5 in foundation and plinth cement mortar 1:4(1 cement : 6 Coarse sand	4.65	Cum		
6(b)-	Cement Mortar1:6	7.40	Cum		
7-	Brick work with common burnt clay bricks FPS bricks of class designation 7.5 in super structure cement mortar 1:6 (1Cement : 6 Coarse Sand)	3.45	Cum		
8-	Cement concrete flooring 1:2:4(1Cement : 2 Coarse sand:4Graded stone aggregate 20 mm nominal size, finished with a floating coat of neat cement, including cement slurry but excluding the cost of nosing. 40 mm thick with 20 mm stone aggregate	10.00	SQM		
9-	P/F water closet squatting pan(Indian type w.c.) with 100 mm SCI trap, 10 Ltr. Low level white PVC cistern, including flush pipe with manually controlled device conforming to IS 7231 with all fitting and fixtures complete	3 Nos.	Each		


	including cutting and making good the walls and floors wherever required white vitreous china Orissa pattern w.c. pan of size 580X440 mm with integral type foot rests.				
10-	Cutting chases in brick masonry walls for sand cast iron pipes and making good the same with cc 1:3:6 including necessary plaster and pointing in cement mortar 1:4(1 cement:6 coarse sand)	10	Metre		
11-	Providing and fixing bend of required degree with access door, insertion rubber washer 3mm thick bolts and nuts complet 100mm dia.	2	Each		
12-	Providing and fixing soil, waste and ventilator pipes.				
(a)	100mm dia sand cast irons S & S pipe as per IS:1729	10	Mtr.		
(b)	75mm Dia sand cast iron IS:1729	10	Mtr.		
13-	15mm Cement Plaster on single or half brick wall of mix. 1:4(1Cement, 4 Fine sand)	137	SQM		
14-	Finishing wall with water proofing cement paint of required shade: New work(Two or more coats applied @ 3.84 Kgs./10SQM)	107	SQM		
15-	Providing and fixing 25 mm thick PVC flush door shutters made out of a one piece multi chamber extended PVC section of the size of 762X25mm or less as per requirement with an average wall thickness of 1mm PVC foam end cap of size 23X10 mm are provided on both vertical edges to ensure the over all thickness of 25mm ms tube having dimensions 19X19mm and 1.00mm is inserted along the hinge size of the door core of the door shutter should be fitted with high density polyurethane foam the top and bottom edges of the shutter are covered with an end cap of size 25X11mm door shutter shall be reinforced with specially polymeric reinforcement;	5.50	SQM		
16-	Marble work gang saw cut (polished and machine cut) of thickness 18mm for wall lining backing filled with a grout of average 12 mm thick cement mortar 1:3(1cement:3 coarse and				

	including pointing with white cement mortar 1:2(1 white cement:2 marble dust) with an admixture of pigment to match the marble shade.				
	Area of slab over 0.50 m ²	11.70	SQM		
17-	Providing and fixing G.I. pipes complet with G.I. fitting and clamps including cutting and making good the walls etc. complet. 15mm dia nominal bore.	25.00	Metre		
18-	Providing and fixing brass bick/stop cock of approved quality 15mm nominal bore	9	Each		
19-	Providing and fixing polyethylene water storage tank with cover and suitable looking arrangement.	500	Per Ltr.		
20-	Jhama brick bats 75 mm	1.10	Cum		

21-	Supplying jhama brick bats of required size.	3.20	Cum		
22-	P/F Factory made P.V.C. door frame of size 50x47 mm with a wall thickness of 5 mm made out of extruded 5mm rigid PVC foam sheet mitred at corners and jointed with 2 Nos. of 150mm long brackets of 15X15 mm ms square tube the vertical door frame profile to be reinforced with 19x19mm ms square tube of 19 gauge EPDM rubber gasket weather seal to be provided through out the frame. The door frame to be fixed to the wall. Using MS screws of 65/100 mm size complet	17.40	Mtr.		

Contractor

Signature & Seal of the

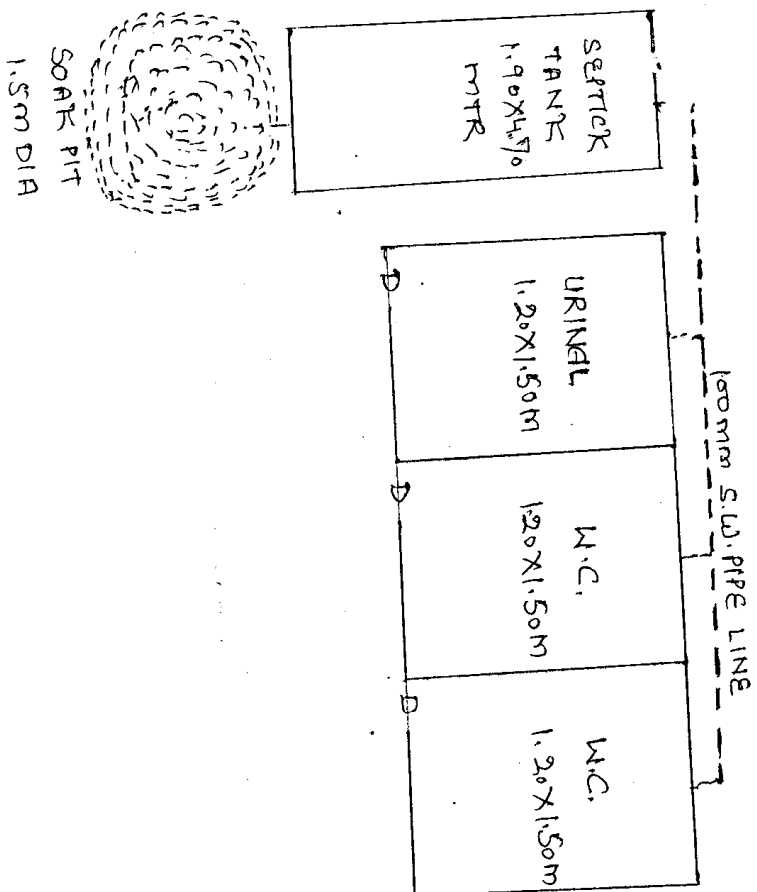

INSTRUCTIONS

1. Foundation will be 0.90x0.90 MTR.
2. Height of toilet will be 2.50 MTR.
3. Pit height will be 0.30 MTR from
4. Work to be carried out as per spec and direction of engineer.

NOT TO SCALE