



राष्ट्रीय बीज निगम लिमिटेड
(भारत सरकार का उपक्रम- मिनिरल कम्पनी)
dsUnzh; jkT; QkeZ] lwjrx<+
ftyk & Jhxaxkuxj ¼jkt0½
फैक्स - 01509 - 223877
nwjHkk"k % 01509-220084,220068

NATIONAL SEEDS CORPORATION LIMITED
(A Government of India Undertaking)
(CIN : U74899DL1963PLC003913)

Central State Farm, Suratgarh
PHONES : 01509-220084,220068
"An ISO 9001:2008 & ISO 14001:2004 Company"
e-mail – csfsuratgarh@rediffmail.com
Website: www.indiaseeds.com

No. CSF/SOG/4-1(83)/2014-15

Dated: 23.05.2015

TENDER NOTICE

1. The Central State Farm, Suratgarh, Sardargarh & Jetsar invites bids for the construction of works detailed in the table given in para-7 here in after. The bidders may submit bids for any or all of the works.
2. Bidding is open to all eligible bidders meeting the eligibility criteria as defined in clause No. 3.5 of instructions to Bidders should, however, be registered with Central Govt. /State Govt. or Central/State Undertakings, Bidders are advised to note the minimum qualification criteria specified in clause 4 of the instructions to bidders to qualify for the award of the contract.
3. Bidding documents (and additional copies) may be purchased from the office of the Manager Engineer (Civil) from 26.05.2015 to 16.06.2015 during office hours for a non-refundable fee as indicated; in the form of cash or Demand Draft on any scheduled bank payable at **SURATGARH** (Raj.) in favor Of **NATIONAL SEEDS CORPORATION LIMITED SURATGARH.**

Interested bidders may obtain further information at the same address. Bidding documents requested by mail will be dispatched by Registered/speed post on payment of an extra amount of ₹. 100/- (Rupees one hundred only). The Management will not be held responsible for the postal delay if any, in the delivery of the documents of non-receipt of the same.

4. Bids must be accompanied by security amount specified for the work in the table below, payable at SURATGARH (Raj.) drawn in favor of NATIONAL SEEDS CORPORATION LIMITED SURATGARH.
- . Bid security will have to be in any one of the forms as specified in the bidding documents and shall have to be valid for 28 days beyond the validity of the bid.
5. Bids must be delivered to the DIRECTOR, CENTRAL STATE FARM, SURATGARH – 335804 on or before 1100 hours on 17.06.2015 and technical bid will be opened on the same day at 1200 hours and financial bid will be opened at 1500 hours in the presence of the bidders who wish to attend. If the office happens to be closed on the date of receipt of the bids as specified the bids will be received and opened on the next working day at the same time and venue.

Contd...2---

: 2 :

6. A pre bid meeting will be held on 16.06.2015 at 1700 hours at the office of MANAGER ENGINEER (CIVIL) TO CLARIFY THE ISSUES AND TO ANSWER QUESTIONS ON ANY MATTER THAT MAY BE RAISED AT THAT STAGE AS STATED IN clause 9.2 of Instructions to Bidders of the Bidding documents.
7. Other details can be seen in the bidding documents.

Sr. No.	Name of Work	Approximate value of work	Bid security	Cost of documents (In ₹.)	Period of completion
		₹. (in Lacs.)			
1.	Covered Threshing Floor 02 no's at CSF Suratgarh	74.60	2.25	2000.00	4 Months
2.	Covered Threshing Floor 02 no's at CSF Sardargarh	74.60	2.25	2000.00	4 Months
3.	Covered Threshing Floor 02 no's at CSF Jetsar	37.30	1.15	1000.00	4 Months

Note:

1. Cement will be issued from the general store of the farm.
2. Number and quantity of Work may increase or decrease.
3. No time extension will be given for execution of work.
4. Canal water is to be used for construction work.
5. Rates should be inclusive of all type of govt. taxes.
6. If any additional items are required to be executed the contractor has to execute in the same proportionate rate quoted by him.
7. The contractor/firm has to be registered for civil construction works.
8. The work experience for the contractor should be 40% of three work or 50% of two works or 80% of one work of similar nature during last seven years.

Manager (Engg-Civil)
For Director



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking-"Mini-Ratna Company")

CENTRAL STATE FARM :- SURATGARH (Raj.)

RATES ARE WITHOUT CEMENT

G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
1	Surface Dressing of the godown including removing vegetation and in equalities not exceeding 15 cm deep and disposal of rubbish lead upto 50m Lift upto 1.5M in all kind of soil.(2.1.1- DSR 2014)	648.00	SQM	5.04	3265.92
2	Earth work excavation in foundation trenches or drains not exceding 1.5 Mtr. in width or 10 SQM. On plan including dressing of side & ramming of bottoms, lift upto 1.5 Mtr. Including getting out the excavated soil & disposal of surplus excavated soil as directed within a lead of 50 Mtr. (2.8.1- DSR 2014)	180.12	CUM	157.50	28368.90
3	Providing & laying cement concrete 1:4:8 in footing & bases for columns, excluding the cost of centring & shuttering. 4.1.8 DSR-2014	181.03	CUM	3366.15	609374.13
4	Brick work with bricks of class designation 75 in foundation & plinth in cement mortar 1: 6 (1 Cement : 6 Course Sand) (6.1.2) DSR-2014	68.87	CUM	4333.5	298448.15
5	Brick work with bricks of class designation 75 in foundation & plinth in cement mortar 1: 6 (1 Cement : 6 Course Sand) (6.1.2) DSR-2014	19.08	CUM	5082.4	96972.19
6	Reinforced Cement concrete work in lintels, beans, plinth beams & bressumers upto floor two level excluding the cost of centring, shuttering, finishing & reinforcement : 1:2:4 (1 Cement : 2 Course sand : 4 Graded Stone aggregate 20 MM nominal size. (5.1.3) DSR-2014	26.62	CUM	3965.90	105572.26
7	Centering and shuttering including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers Code No.- 5.9.1 (Page No. 97), DSR-2014	254.41	Sqm	196.45	49978.84
8	Steel reinforcement for R.C.C work including straighteining, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars. Code No.- 5.22.6 (Page No. 99), DSR- 2014	2129.54	Kg.	68.10	145021.67
9a	20 MM Cement plaster of Mix : 1:6 (1Cement : 6 Course Sand) Code No. - 13.4.2 (Page No. 222) DSR, CPWD 2014	48.13	Sqm	189.60	9125.45
9b	12 MM Cement plaster of Mix : 1:6 (1Cement : 6 Course Sand) Code No. - 13.4.2 (Page No. 222) DSR, CPWD 2014	120.75	Sqm	138.60	16735.95
10	Filling With avialable earth (excluding rock) in trenches or in plinth sides of foundations etc in layers not exceeding 20cm in depth consolidating each layer by ramming watering lead upto 50m and lift upto 1.5m. Ref. 2.25 (DSR-2014)	297.79	Cum	112.40	33471.60
11	Structural steel work riveted, bolted or welded in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete. 10.20 DSR-2014	16990.00	Kg.	73.95	1256410.50
	DETAIL OF TUBULAR TRUSSES. Tubular turss - 18 mtr span 88.90 mm O/D struts- 42.90 mm O/D principal rafter - main tie- 88.90 mm O/D				
	Cleat plates - 175 X 100 X 6 mm plantas - 150 X 150 X 10 MM 250 X 250 X 15 MM Joint Base plates - Approximate weight				
ii)	Main column (4.80 mtr high) pipe- 114.3 mm O/D X 452 X 12 mm Approximate weight vertical main foundation base plates - 915 Struts - 42.4 mm O/D				
iii)	Purlins 60.3 mm O/D (to suit for distance of trusses 3.69 mtr C/C tubes for 10 bays of above trusses with plates nut bolts etc. Complete 220 nos approximate weight				
iv)	Bottom chords in two row in ten bays of 60.3 mm O/D complete in all respect - approximate weight				
v)	Rafter brecing of 16 mm dia MS round bars & hooks etc complete two sets approximate weight				



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking- "Mini-Ratna Company")

CENTRAL STATE FARM :- SURATGARH (Raj.)

RATES ARE WITHOUT CEMENT

G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
12	Providing corrugated G.S. sheet roofing including vertical / curved surface fixed with polymer coated J or L hooks, bolts and nuts 8 mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (up to any pitch in horizontal/ vertical or curved surfaces), excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.63 mm thick with zinc coating not less than 275 gm/ m². (12.1.3) - DSR- 2014	1007.00	SQM	743.45	748654.15
13	Providing ridges or hips of width 60 cm overall width plain G.S. sheet fixed with polymer coated J. or L hooks, bolts and nuts 8 mm dia G.I. limpet and bitumen washers complete. 0.63 mm thick with zinc coating not less than 275 gm/m². (12.4.2) DSR-2014	37.00	Mtr	502.75	18601.75
14	Cement concrete flooring grade 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) rounding of edges etc. but excluding the cost of nosing of steps etc. complete 50mm thick or 20mm thick nominal size aggregate.(11.3.1)B DSR-2014	715.50	SQM	259.85	185922.68
15	Providing and applying plaster of paris putty of 2 mm thickness over plastered surface to prepare the surface even and smooth complete. (13.26) DSR-2014	37.21	SQM	110.95	4128.45
16	Distempering with dry distemper of approved brand and manufacture (two or more coats) of required shade on new work, over and including water thinnable priming coat to give an even shade. (13.40) DSR-2014	163.48	Sqm	68.60	11214.73
Sub Total					3621267.31
ADD 3% for Electrification (As per Requirement of Site)					108638.02
G.Schedule Amount					3729905.33

G.SCHEDULE AMOUNT FOR TWO (02) NO'S = Rs. 3729905.33 x 02

7459810.668

Terms & Conditions

1. All the tools and plants will be arranged by the contractor.
2. Insurance of labour working at site will be done by the contractor.
3. No. & Quantity of the work may increase or decrease.
4. Cement will be provided from the general store of the farm.
5. For all construction works strictly canal water is to be used at site.
6. If any additional item is req to be executed, payment will be made in propostionate rate of the contractor.

Rate quoted by contractor _____ % Above on G. schedule amount

Rate quoted by contractor _____ % Below on G. schedule amount

**Name and Signature of
Contractor**



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking-"Mini-Ratna Company")

CENTRAL STATE FARM :- SARDARGARH (Raj.)

RATES ARE WITHOUT CEMENT

G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
1	Surface Dressing of the godown including removing vegetation and in equalities not exceeding 15 cm deep and disposal of rubbish lead upto 50m Lift upto 1.5M in all kind of soil.(2.1.1- DSR 2014)	648.00	SQM	5.04	3265.92
2	Earth work excavation in foundation trenches or drains not exceding 1.5 Mtr. in width or 10 SQM. On plan including dressing of side & ramming of bottoms, lift upto 1.5 Mtr. Including getting out the excavated soil & disposal of surplus excavated soil as directed within a lead of 50 Mtr. (2.8.1- DSR 2014)	180.12	CUM	157.50	28368.90
3	Providing & laying cement concrete 1:4:8 in footing & bases for columns, excluding the cost of centring & shuttering. 4.1.8 DSR-2014	181.03	CUM	3366.15	609374.13
4	Brick work with bricks of class designation 75 in foundation & plinth in cement mortar 1: 6 (1 Cement : 6 Course Sand) (6.1.2) DSR-2014	68.87	CUM	4333.5	298448.15
5	Brick work with bricks of class designation 75 in foundation & plinth in cement mortar 1: 6 (1 Cement : 6 Course Sand) (6.1.2) DSR-2014	19.08	CUM	5082.4	96972.19
6	Reinforced Cement concrete work in lintels, beans, plinth beams & bressumers upto floor two level excluding the cost of centring, shuttering, finishing & reinforcement : 1:2:4 (1 Cement : 2 Course sand : 4 Graded Stone aggregate 20 MM nominal size. (5.1.3) DSR-2014	26.62	CUM	3965.90	105572.26
7	Centering and shuttering including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers Code No.- 5.9.1 (Page No. 97), DSR-2014	254.41	Sqm	196.45	49978.84
8	Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars. Code No.- 5.22.6 (Page No. 99), DSR- 2014	2129.54	Kg.	68.10	145021.67
9a	20 MM Cement plaster of Mix : 1:6 (1Cement : 6 Course Sand) Code No. - 13.4.2 (Page No. 222) DSR, CPWD 2014	48.13	Sqm	189.60	9125.45
9b	12 MM Cement plaster of Mix : 1:6 (1Cement : 6 Course Sand) Code No. - 13.4.2 (Page No. 222) DSR, CPWD 2014	120.75	Sqm	138.60	16735.95
10	Filling With avialable earth (excluding rock) in trenches or in plinth sides of foundations etc in layers not exceeding 20cm in depth consolidating each layer by ramming watering lead upto 50m and lift upto 1.5m. Ref. 2.25 (DSR-2014)	297.79	Cum	112.40	33471.60
11	Structural steel work riveted, bolted or welded in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete. 10.20 DSR-2014	16990.00	Kg.	73.95	1256410.50
	DETAIL OF TUBULAR TRUSSES. Tubular turss - 18 mtr span rafter - 88.90 mm O/D mm O/D principal main tie- 88.90 struts- 42.90 mm O/D				
	Cleat plates - 175 X 100 X 6 mm plantes - 150 X 150 X 10 MM 250 X 250 X 15 MM Joint Base plates - Approximate weight				
ii)	Main column (4.80 mtr high) main pipe- 114.3 mm O/D plates - 915 X 452 X 12 mm Approximate weight vertical foundation base Struts - 42.4 mm O/D				
iii)	Purlins 60.3 mm O/D (to suit for distance of trusses 3.69 mtr C/C tubes for 10 bays of above trusses with plates nut bolts etc. Complete 220 nos approximate weight				
iv)	Bottom chords in two row in ten bays of 60.3 mm O/D complete in all respect - approximate weight				
v)	Rafter brecing of 16 mm dia MS round bars & hooks etc complete two sets approximate weight				
12	Providing corrugated G.S. sheet roofing including vertical / curved surface fixed with polymer coated J or L hooks, bolts and nuts 8 mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (up to any pitch in horizontal/ vertical or curved surfaces), excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.63 mm thick with zinc coating not less than 275 gm/ m². (12.1.3) - DSR- 2014	1007.00	SQM	743.45	748654.15



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking-"Mini-Ratna Company")

CENTRAL STATE FARM :- SARDARGARH (Raj.)

RATES ARE WITHOUT CEMENT

G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
13	Providing ridges or hips of width 60 cm overall width plain G.S. sheet fixed with polymer coated J. or L hooks, bolts and nuts 8 mm dia G.I. limpet and bitumen washers complete. 0.63 mm thick with zinc coating not less than 275 gm/m². (12.4.2) DSR-2014	37.00	Mtr	502.75	18601.75
14	Cement concrete flooring grade 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) rounding of edges etc. but excluding the cost of nosing of steps etc. complete 50mm thick or 20mm thick nominal size aggregate.(11.3.1)B DSR-2014	715.50	SQM	259.85	185922.68
15	Providing and applying plaster of paris putty of 2 mm thickness over plastered surface to prepare the surface even and smooth complete. (13.26) DSR-2014	37.21	SQM	110.95	4128.45
16	Distemping with dry distemper of approved brand and manufacture (two or more coats) of required shade on new work, over and including water thinnable priming coat to give an even shade. (13.40) DSR-2014	163.48	Sqm	68.60	11214.73
Sub Total					3621267.31
ADD 3% for Electrification (As per Requirement of Site)					108638.02
G.Schedule Amount for one no.					3729905.33

G.SCHEDULE AMOUNT FOR TWO (02) NO'S = Rs. 3729905.33 x 02

7459810.668

Terms & Conditions

1. All the tools and plants will be arranged by the contractor.
2. Insurance of labour working at site will be done by the contractor.
3. No. & Quantity of the work may increase or decrease.
4. Cement will be provided from the general store of the farm.
5. For all construction works strictly canal water is to be used at site.
6. If any additional item is req to be executed, payment will be made in propostionate rate of the contractor.

Rate quoted by contractor _____% Above on G. schedule amount

Rate quoted by contractor _____% Below on G. schedule amount

**Name and Signature of
Contractor**



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking-"Mini-Ratna Company")

CENTRAL STATE FARM :- JETSAR (Raj.)

RATES ARE WITHOUT CEMENT

G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
1	Surface Dressing of the godown including removing vegetation and in equalities not exceeding 15 cm deep and disposal of rubbish lead upto 50m Lift upto 1.5M in all kind of soil.(2.1.1- DSR 2014)	648.00	SQM	5.04	3265.92
2	Earth work excavation in foundation trenches or drains not exceding 1.5 Mtr. in width or 10 SQM. On plan including dressing of side & ramming of bottoms, lift upto 1.5 Mtr. Including getting out the excavated soil & disposal of surplus excavated soil as directed within a lead of 50 Mtr. (2.8.1- DSR 2014)	180.12	CUM	157.50	28368.90
3	Providing & laying cement concrete 1:4:8 in footing & bases for columns, excluding the cost of centring & shuttering. 4.1.8 DSR-2014	181.03	CUM	3366.15	609374.13
4	Brick work with bricks of class designation 75 in foundation & plinth in cement mortar 1: 6 (1 Cement : 6 Course Sand) (6.1.2) DSR-2014	68.87	CUM	4333.5	298448.15
5	Brick work with bricks of class designation 75 in foundation & plinth in cement mortar 1: 6 (1 Cement : 6 Course Sand) (6.1.2) DSR-2014	19.08	CUM	5082.4	96972.19
6	Reinforced Cement concrete work in lintels, beans, plinth beams & bressumers upto floor two level excluding the cost of centring, shuttering, finishing & reinforcement : 1:2:4 (1 Cement : 2 Course sand : 4 Graded Stone aggregate 20 MM nominal size. (5.1.3) DSR-2014	26.62	CUM	3965.90	105572.26
7	Centering and shuttering including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers Code No.- 5.9.1 (Page No. 97), DSR-2014	254.41	Sqm	196.45	49978.84
8	Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars. Code No.- 5.22.6 (Page No. 99), DSR- 2014	2129.54	Kg.	68.10	145021.67
9a	20 MM Cement plaster of Mix : 1:6 (1Cement : 6 Course Sand) Code No. - 13.4.2 (Page No. 222) DSR, CPWD 2014	48.13	Sqm	189.60	9125.45
9b	12 MM Cement plaster of Mix : 1:6 (1Cement : 6 Course Sand) Code No. - 13.4.2 (Page No. 222) DSR, CPWD 2014	120.75	Sqm	138.60	16735.95
10	Filling With avialable earth (excluding rock) in trenches or in plinth sides of foundations etc in layers not exceeding 20cm in depth consolidating each layer by ramming watering lead upto 50m and lift upto 1.5m. Ref. 2.25 (DSR-2014)	297.79	Cum	112.40	33471.60
11	Structural steel work riveted, bolted or welded in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete. 10.20 DSR-2014	16990.00	Kg.	73.95	1256410.50
	DETAIL OF TUBULAR TRUSSES. Tubular turss - 18 mtr span rafter - 88.90 mm O/D mm O/D principal main tie- 88.90 struts- 42.90 mm O/D				
	Cleat plates - 175 X 100 X 6 mm plantas - 150 X 150 X 10 MM 250 X 250 X 15 MM Joint Base plates - Approximate weight				
ii)	Main column (4.80 mtr high) main pipe- 114.3 mm O/D plates - 915 X 452 X 12 mm Approximate weight vertical foundation base Struts - 42.4 mm O/D				
iii)	Purlins 60.3 mm O/D (to suit for distance of trusses 3.69 mtr C/C tubes for 10 bays of above trusses with plates nut bolts etc. Complete 220 nos approximate weight				
iv)	Bottom chords in two row in ten bays of 60.3 mm O/D complete in all respect - approximate weight				
v)	Rafter brecing of 16 mm dia MS round bars & hooks etc complete two sets approximate weight				
12	Providing corrugated G.S. sheet roofing including vertical / curved surface fixed with polymer coated J or L hooks, bolts and nuts 8 mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (up to any pitch in horizontal/ vertical or curved surfaces), excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.63 mm thick with zinc coating not less than 275 gm/ m². (12.1.3) - DSR- 2014	1007.00	SQM	743.45	748654.15



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking-"Mini-Ratna Company")

CENTRAL STATE FARM :- JETSAR (Raj.)

RATES ARE WITHOUT CEMENT

G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT
13	Providing ridges or hips of width 60 cm overall width plain G.S. sheet fixed with polymer coated J. or L hooks, bolts and nuts 8 mm dia G.I. limpet and bitumen washers complete. 0.63 mm thick with zinc coating not less than 275 gm/m². (12.4.2) DSR-2014	37.00	Mtr	502.75	18601.75
14	Cement concrete flooring grade 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) rounding of edges etc. but excluding the cost of nosing of steps etc. complete 50mm thick or 20mm thick nominal size aggregate.(11.3.1)B DSR-2014	715.50	SQM	259.85	185922.68
15	Providing and applying plaster of paris putty of 2 mm thickness over plastered surface to prepare the surface even and smooth complete. (13.26) DSR-2014	37.21	SQM	110.95	4128.45
16	Distempering with dry distemper of approved brand and manufacture (two or more coats) of required shade on new work, over and including water thinnable priming coat to give an even shade. (13.40) DSR-2014	163.48	Sqm	68.60	11214.73
Sub Total					3621267.31
ADD 3% for Electrification (As per Requirement of Site)					108638.02
G.Schedule Amount					3729905.33

Terms & Conditions

1. All the tools and plants will be arranged by the contractor.
2. Insurance of labour working at site will be done by the contractor.
3. No. & Quantity of the work may increase or decrease.
4. Cement will be provided from the general store of the farm.
5. For all construction works strictly canal water is to be used at site.
6. If any additional item is req to be executed, payment will be made in propostionate rate of the contractor.

Rate quoted by contractor _____ % Above on G. schedule amount

Rate quoted by contractor _____ % Below on G. schedule amount

**Name and Signature of
Contractor**



NATIONAL SEEDS CORPORATION LTD.

(A Govt. of India Undertaking-"Mini-Ratna Company")

CENTRAL STATE FARM :- JETSAR (Raj.)

RATES ARE WITHOUT CEMENT


G.SCHEDULE FOR CONSTRUCTION OF COVERD SHED OF SIZE :18 X 36 Mtrs. Along with one room (20'-00" x 20'-00")					
SR. NO.	ITEM OF WORK	QTY.	UNIT	RATE	AMOUNT




NATIONAL SEEDS CORPORATION LIMITED

(A Govt. of India Undertaking-"Mini-Ratna Company")


CENTRAL STATE FARM :- SURATGARH (Raj.)

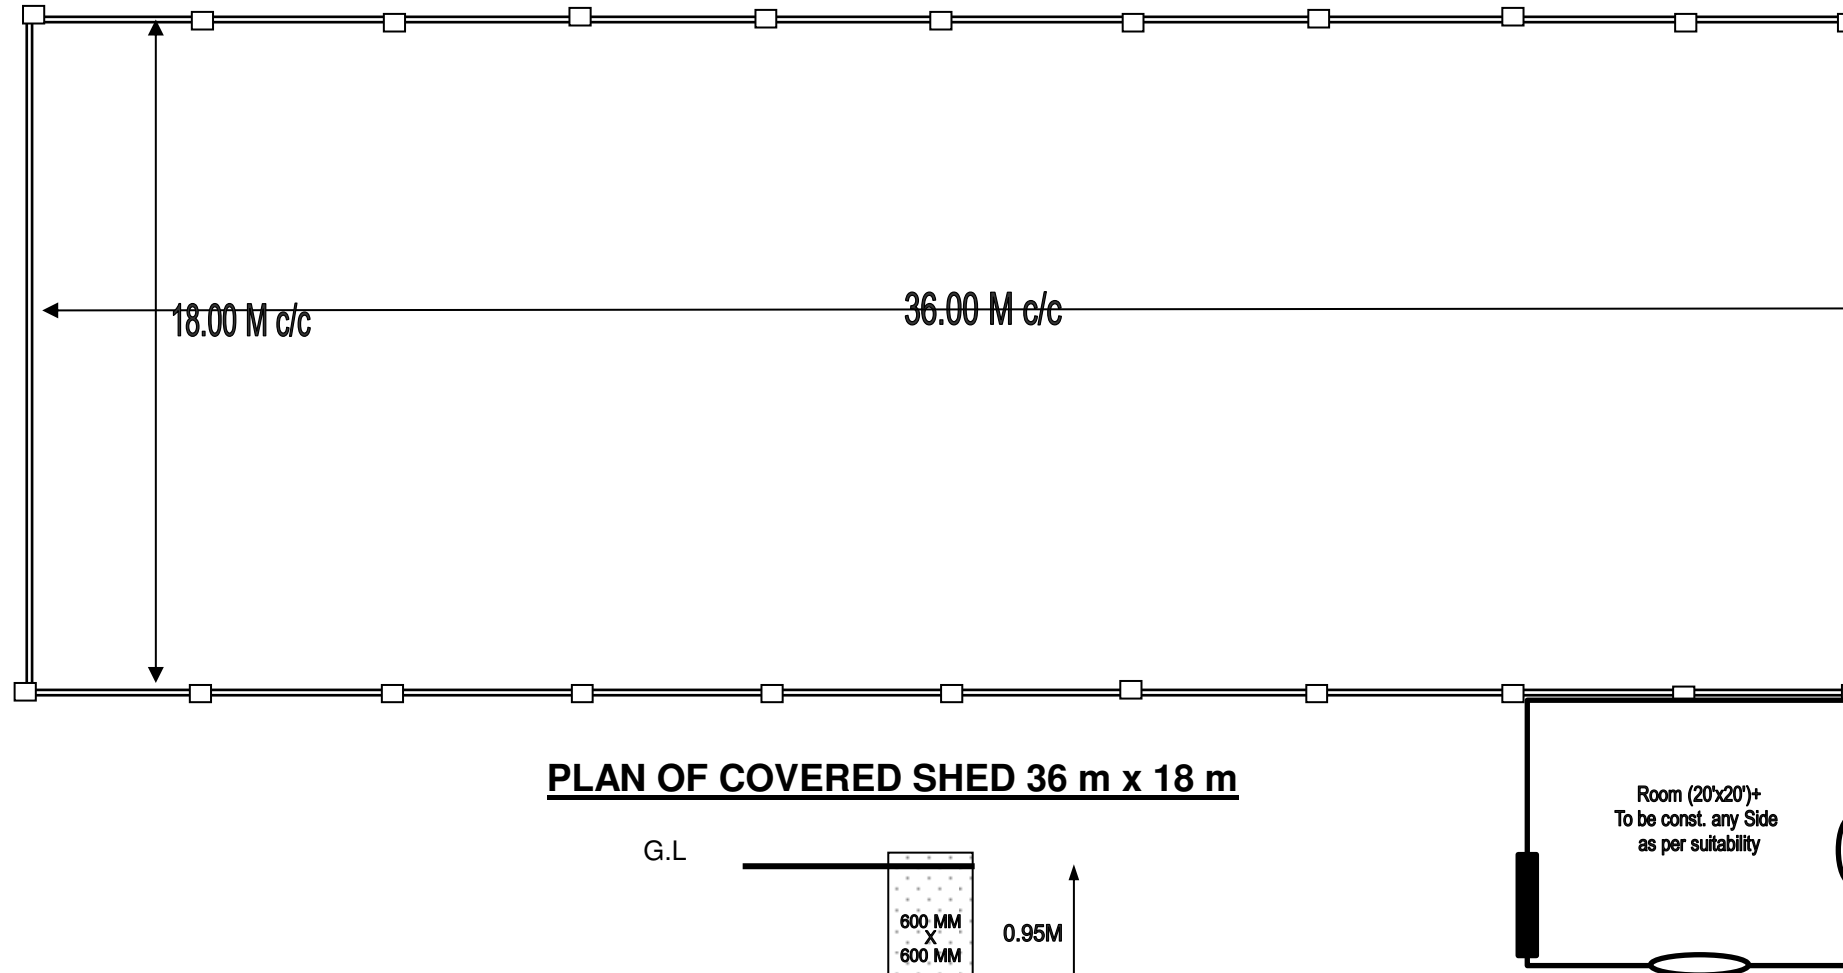

PLAN OF COVERED SHED 36 m x 18 m

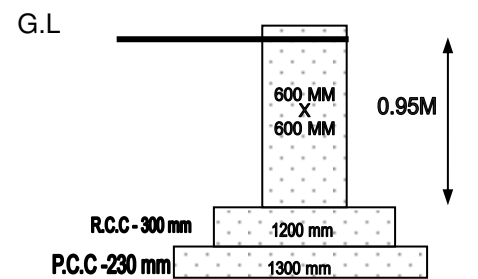

DETAILL OF COL. FOUND.

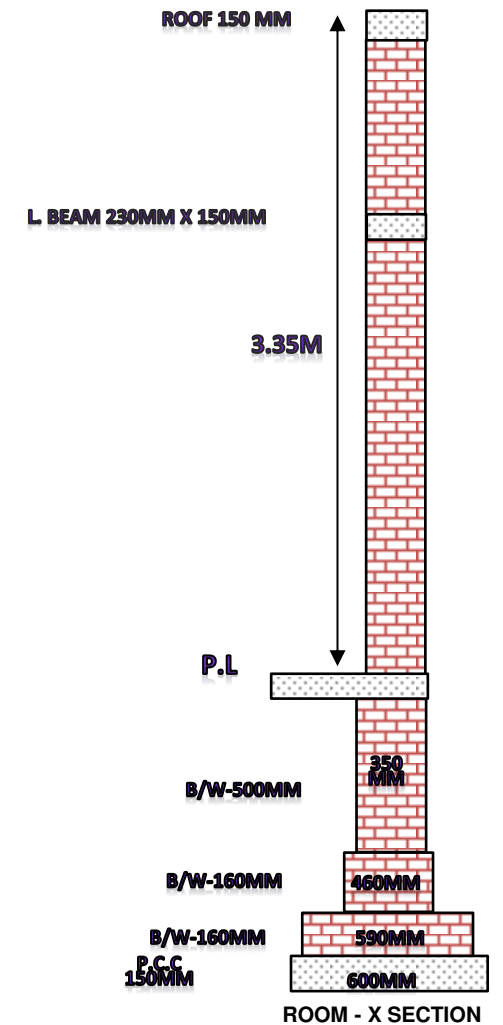

Sign. **MANAGER (Engg.-C)**
CSF - SURATGARH

Sign. **J.E - CIVIL**
CSF - SURATGARH